# SXM 2 1

## Technical specification

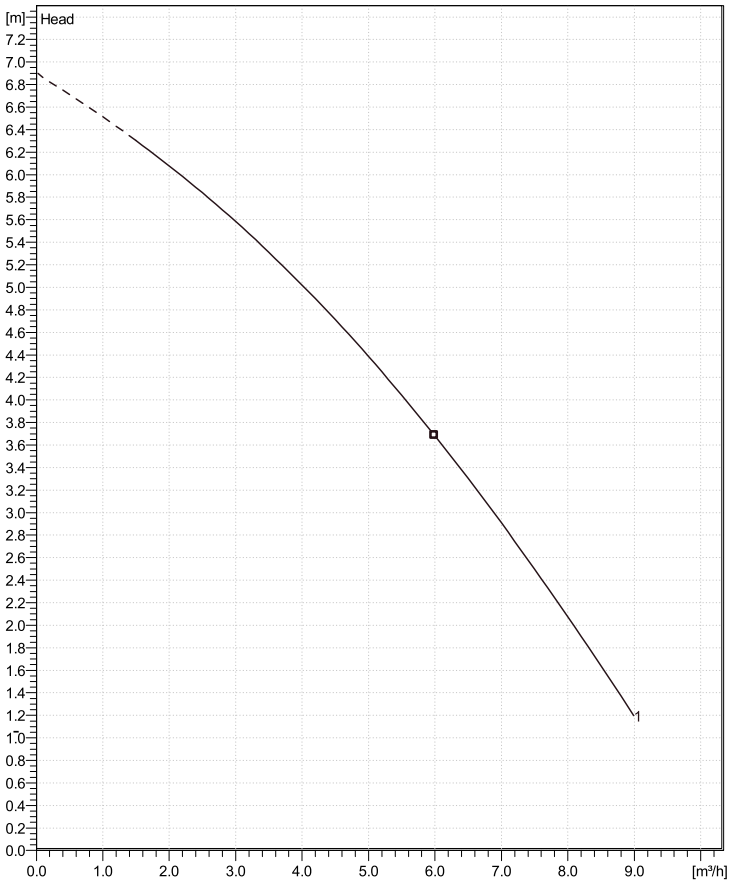


*Water, pure* *Curve ISO*

Note: Picture might not correspond to the current configuration.

**Impeller**

| | |
|---|---|
| Outlet diameter | 0 mm |
| Suction Flange Diameter | |
| Impeller diameter | 0 mm |
| Number of blades | 0 |

**Installation: Pump with float switch**

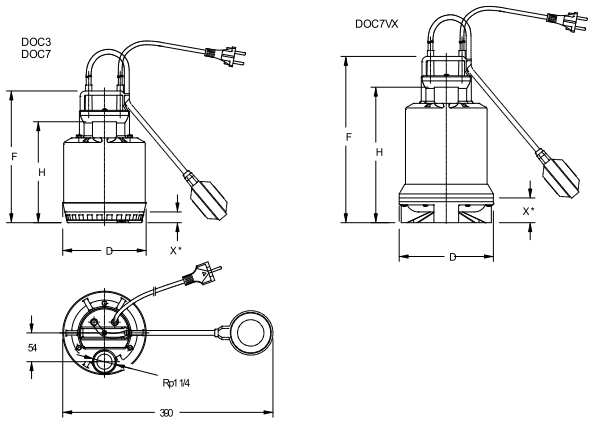


**Motor**

| | |
|---|---|
| Motor # | SA 25M63D |
| Stator variant | |
| Frequency | 50 Hz |
| Rated voltage | 230 V |
| Number of poles | 2 |
| Phases | 1~ |
| Rated power | 0.25 kW |
| Rated current | 1.43 A |
| Starting current | 0 A |
| Rated speed | 2900 rpm |

Power factor
- 1/1 Load
- 3/4 Load
- 1/2 Load

Pump efficiency
- 1/1 Load
- 3/4 Load
- 1/2 Load

**Project:**
**Project ID:**
**Date:** 2/2/2022

# SXM 2

1

## Performance curve

### Pump

| | |
|---|---|
| Impeller diameter | 0 mm |

### Motor

| | |
|---|---|
| Motor # | SA 25M63D |
| Frequency | 50 Hz |
| Rated voltage | 230 V |
| Number of poles | 2 |
| Phases | 1~ |
| Rated power | 0.25 kW |
| Rated current | 1.43 A |
| Rated speed | 2900 rpm |

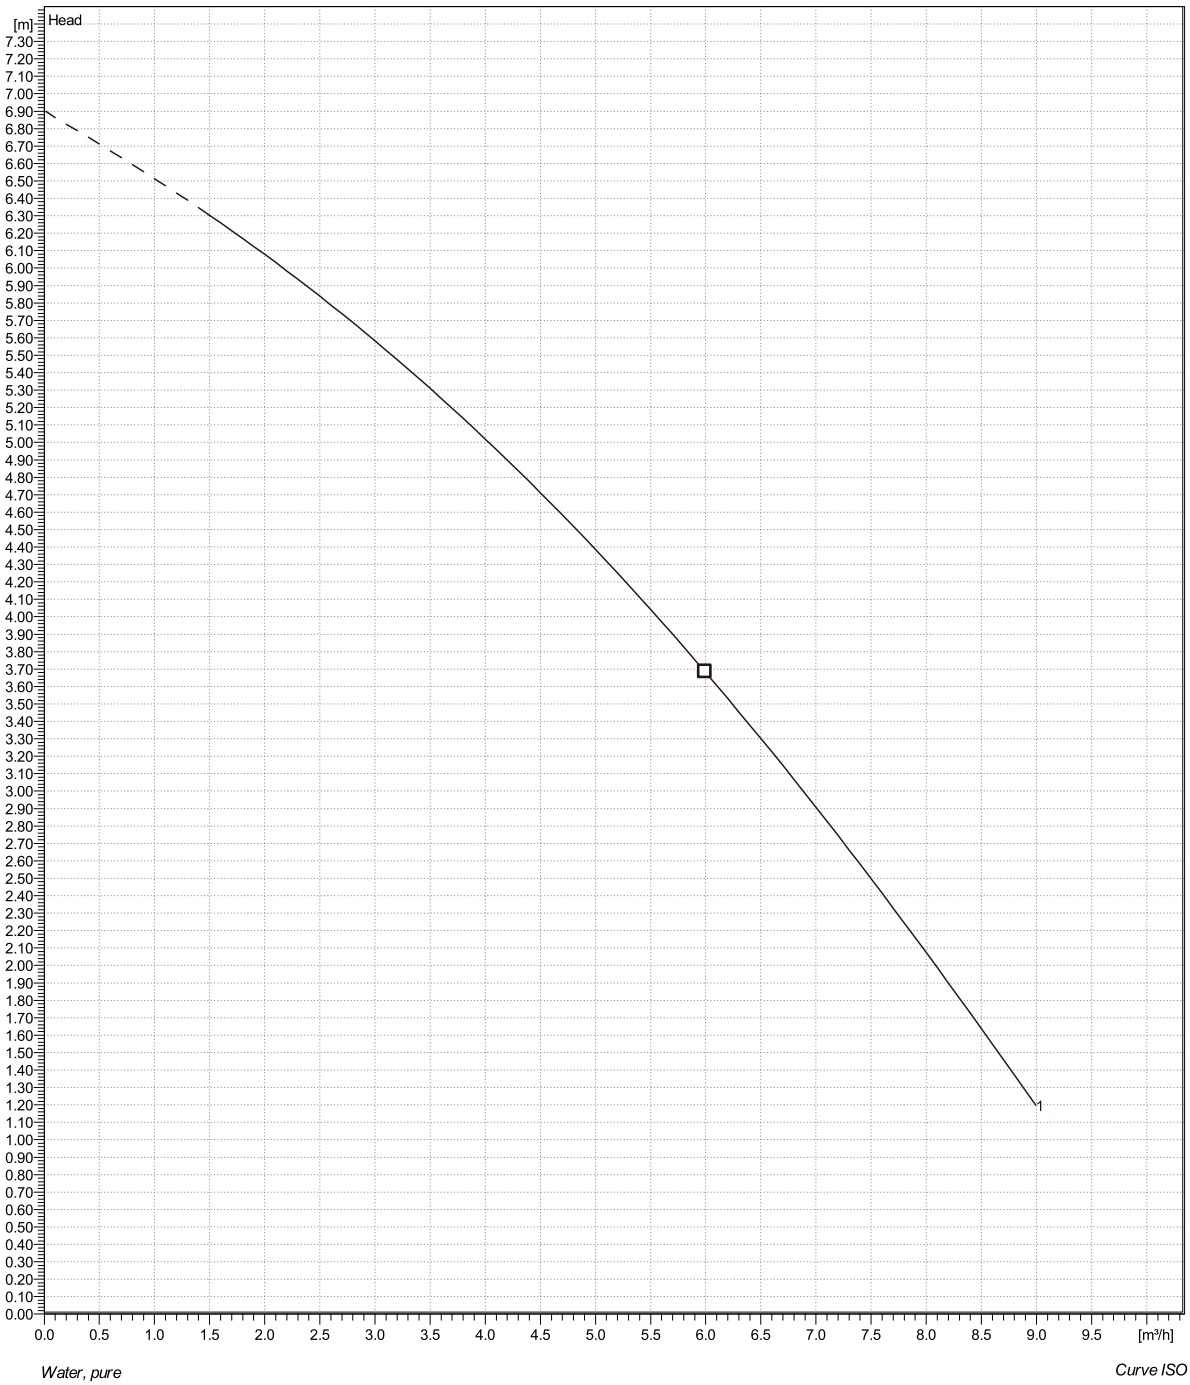


*Water, pure*

*Curve ISO*

| Project | Project ID | Created by | Created on | Last update |
|---|---|---|---|---|
| | | | **2/2/2022** | **2/2/2022** |

# SXM 2 Installation: Pump with float switch

## Dimensional drawing

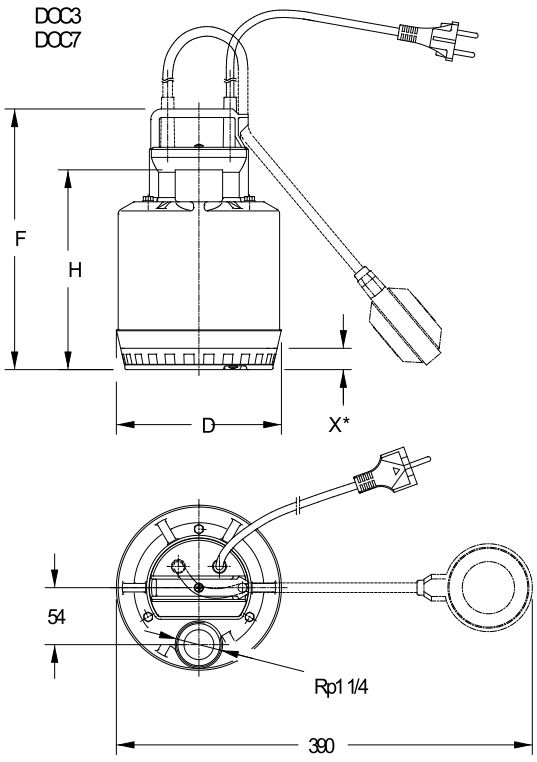


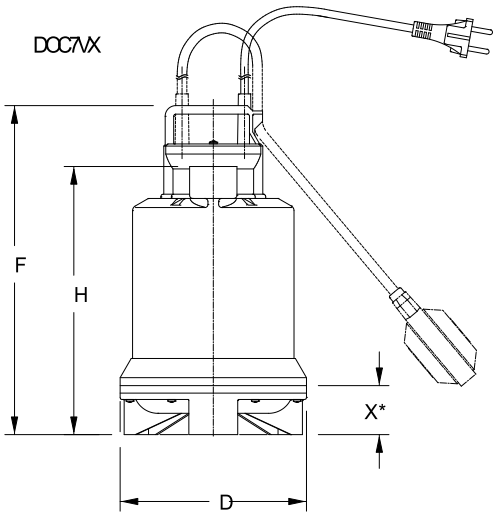


**Project:**

**Project ID:**

**Date:** 2/2/2022